

HIGH FLOW MUFFLER

HFMP-SERIES


PLASTIC BODY



Built with the same concepts as our popular HFMA-Series, but more affordable. Our HFMP-Series utilize glass-filled nylon housing which is ultrasonically welded for maximum strength.

Both HFMA and HFMP Series offers greater flow with less pressure drop than the BM-Series, while lowering noise levels. Please refer to the sound and flow characteristics charts listed below for more information. Unit should be mounted in a protective position free from excessive vibration. Hand tighten to the device only.

Symbol



HOW TO ORDER

HFMP

High Flow Muffler
Plastic Body



Connection
18=1/8", 28=1/4"
38=3/8", 48=1/2"



None = NPT
P=BSPT (Metric)









Body Color
None = Black
Y = Yellow

SPECIFICATIONS

ITEM	MODEL	HFMP-18	HFMP-28	HFMP-38	HFMP-48
CONNECTION	NPT	1/8"	1/4"	3/8"	1/2"
OVERALL LENGTH	IN.	2 9/64"	2 4/32"	3 7/16"	3 7/16"
DIAMETER	IN.	27/32"	27/32"	1 1/4"	1 1/4"
HEX	IN.	11/16"	11/16"	1 5/32"	1 5/32"
MATERIAL	BODY ELEMENT	NYLON			
		50 MESH STAINLESS STEEL SCREEN			
MAX OPERATING PRESSURE		150 PSI (10.55 kg/cm ²)			
OPERATING TEMPERATURE		35~ 120°F (1.6~ 50°C)			
WEIGHT APPROX.	OZ.	0.40	0.48	1.60	1.60
UNIT PACK	EA.	5	5	5	5

SOUND CHARACTERISTICS

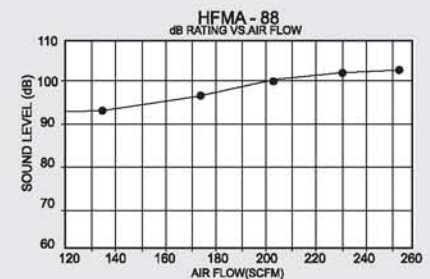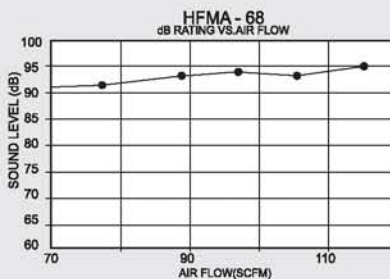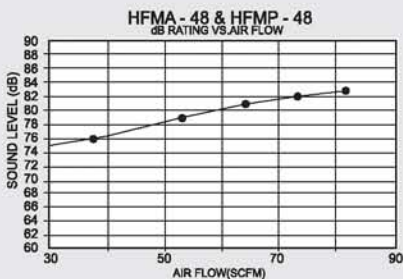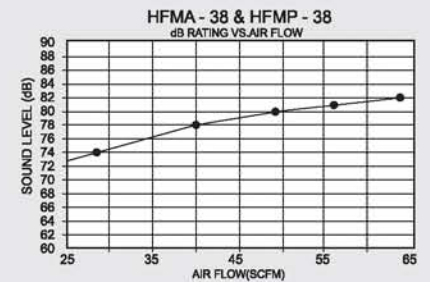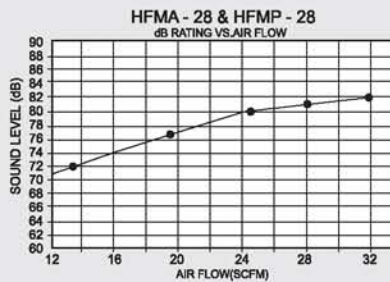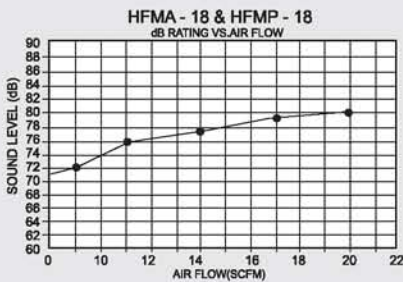

©2004 Aidsens Tech. All Rights Reserved.

*All tests are performed by Consolidated Laboratories, Inc.